




DECKING & CLADDING SYSTEMS

Discover the ideal
combination of durability
and style with our products

2025 Edition

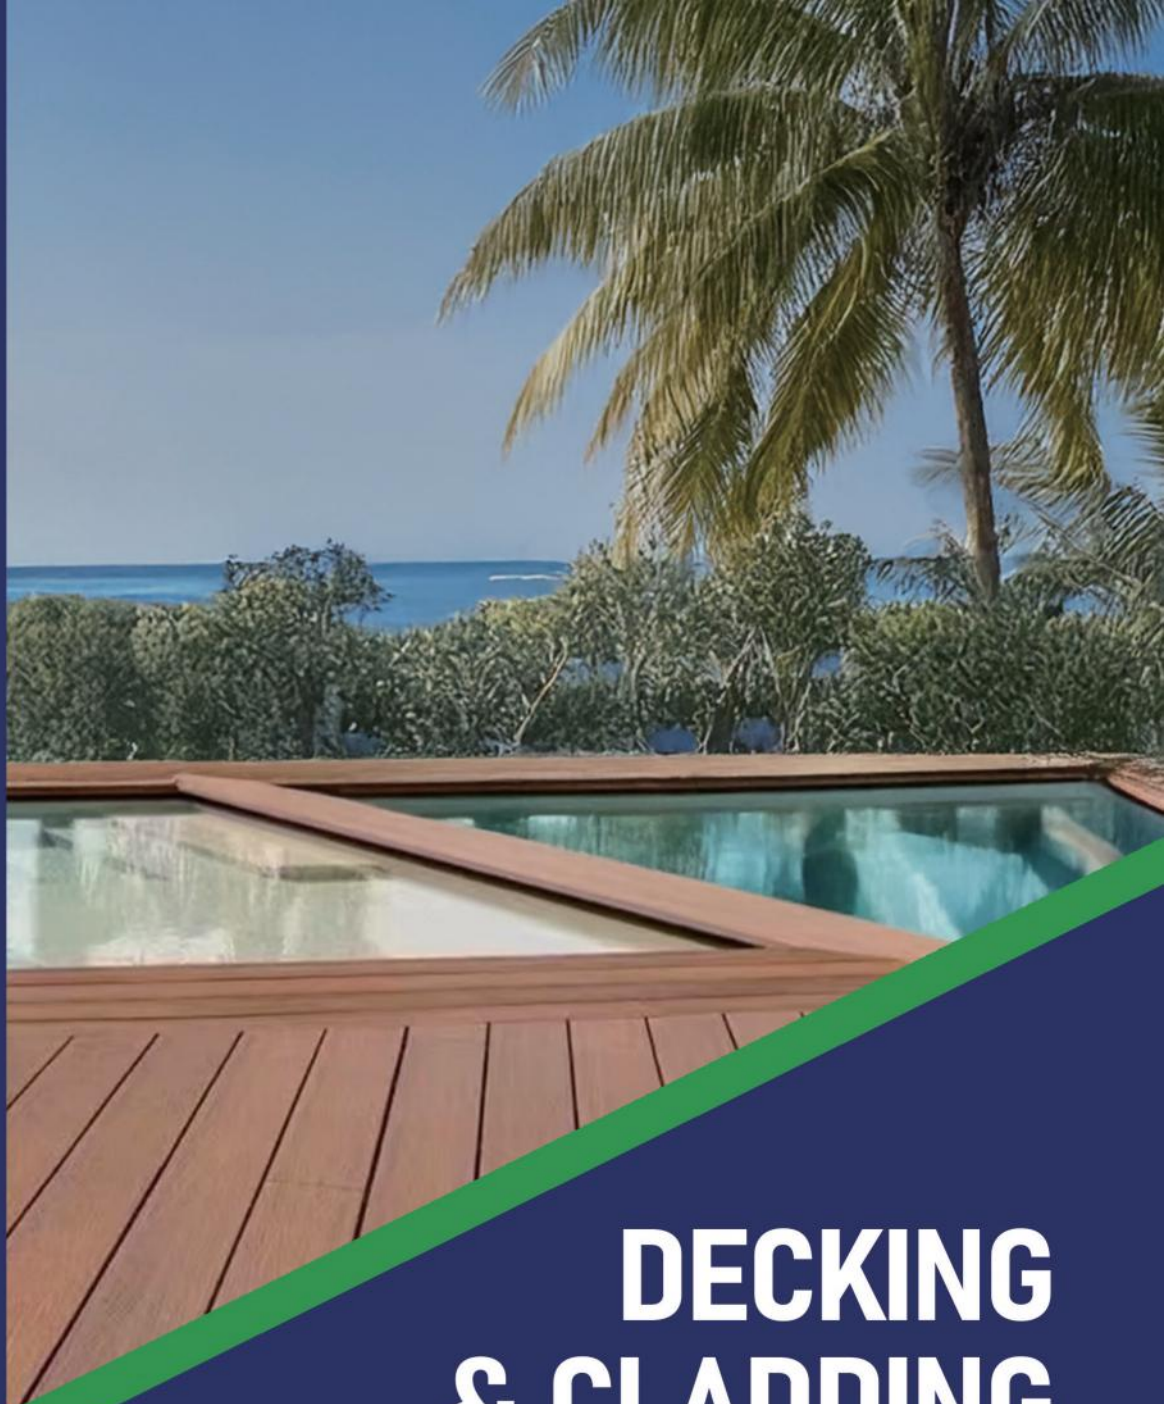




WPC Collection


PE Series



137 x 23 x 5400 mm



Monarch Red




Rosewood




Oak Wood




Dark Grey



Hickory Brown



Blackbutt



White Birch




Light Grey


SURLYN COATING Series




137 x 23 x 5400 mm




IPE




Teak




Dark Grey



Walnut



Antique




Ashwood


SURLYN COATING (NO GAP) Series




145 x 23 x 5400 mm




IPE




Teak




Dark Grey



Walnut



Antique



Ashwood

HardBark®

PVC Collection

ASA Series


 140 x 24 x 5400 mm




Fossil




Tawny




Pecan




Graphite



Arabica



Silver Grey



Pacific Merbau



Willow Oak

Estate Series

 185 x 30 x 3600 mm




Chestnut



Cedar



Golden Teak



Vintage Slate




Grey



Moon Mist

Heriton Decking System

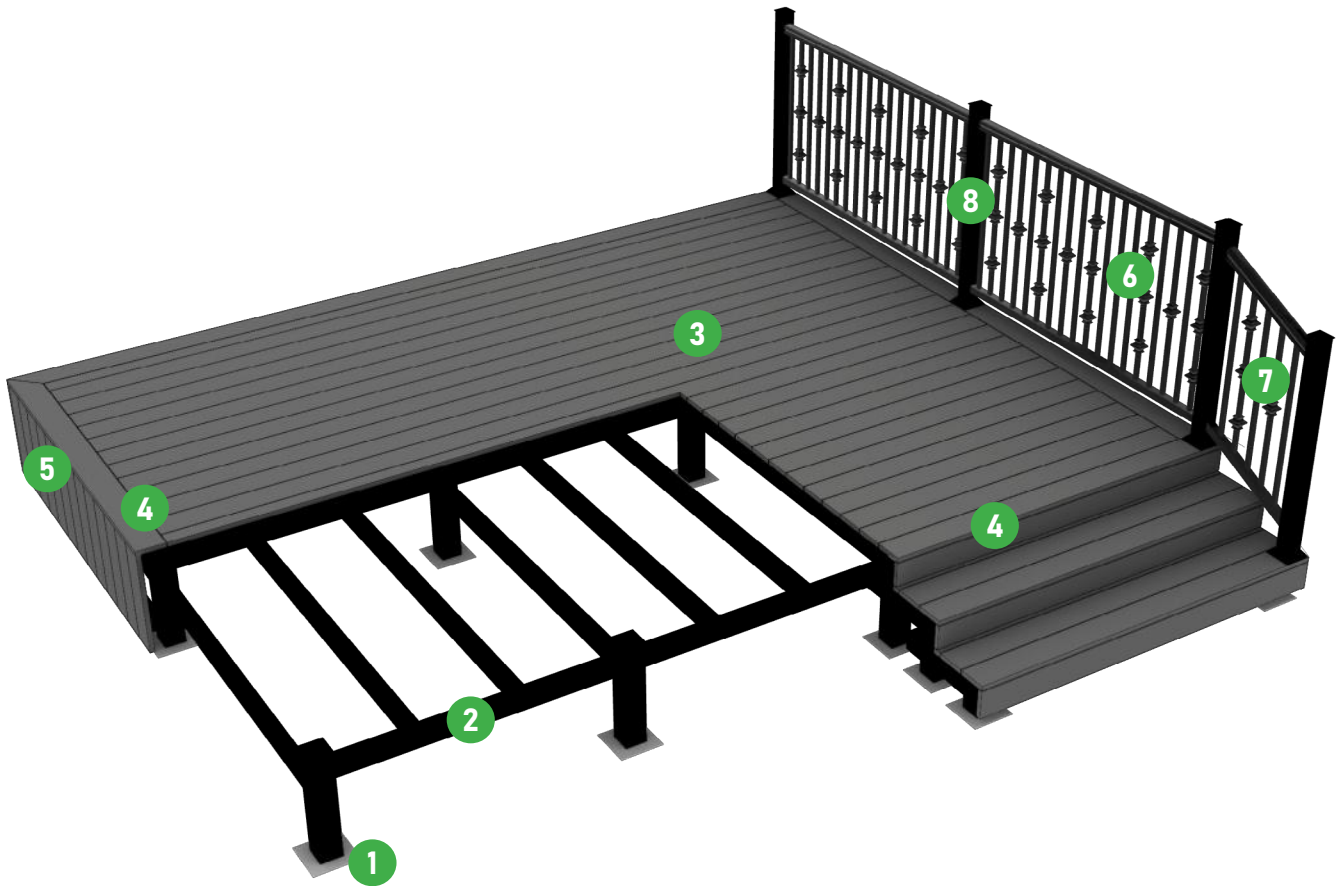

1. Footings

Provide a solid foundation for long-term stability.

2. Supporting Structure

Timber : H3 Treated Pine (90×45×6000mm) & H4 Treated Pine (100×100×3000mm)

Metal : Aluminium frame (100×50mm & 100×100mm)

3. Decking Board

5 series from Heriton & Hardbark, with innovative WPC and PVC materials for versatile garden design.

4. Edge Board

Installed at edges and steps for a neat finishing solution.

5. Fascia Board

Applied around raised platforms to create a clean, elegant appearance.

6. Balustrade - Fixed Handrail Panel

Provides safety on platforms.

7. Balustrade - Adjustable Handrail Panel

Flexible stair handrail solution for varied angles.

8. Balustrade - Flange Post

Supports the handrail system. Entire system can be completed with Heriton & Hardbark products.





TOP SELLER
FOR
EVERYDAY
PROJECTS

WPC PE Series

New Tech 2nd Generation CO-Extrusion

The WPC PE Series of New Tech 2nd Generation Co-Extrusion decking is engineered with an innovative PE outer layer process, forming a durable shield around the composite core.

This technology enhances colour richness, ensures excellent resistance to stains, and comes with an extended warranty of up to 20 years.

With its refined surface detail, the WPC PE Series captures the warmth and character of natural timber, without the demanding maintenance.



Resistant to mould and fading



Waterproof and weather resistant





Low maintenance, easy care

Decking Installation System

Stainless Steel Start Clip



Stainless Steel Middle Clip

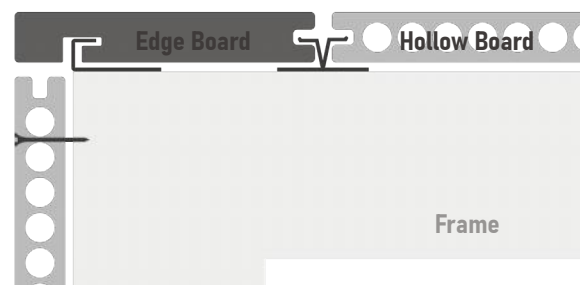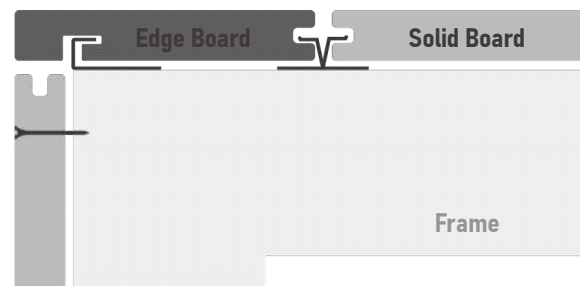



PE Double-Sided Board

Size: 137*23*5400mm Hollow Panel



137*23*5400mm Edge Panel



Monarch Red / Hickory
Brown



Light Grey / Dark Grey



White Birch / Oak Wood



Blackbutt / Rosewood

PE Double-Sided Board


Size: 137*23*5400mm Solid Panel



137*23*5400mm Edge Panel



Monarch Red / Hickory
Brown



Light Grey / Dark Grey



White Birch / Oak Wood




Blackbutt / Rosewood




Monarch Red



Hickory Brown



Rosewood




Blackbutt





Oak Wood



White Birch



Dark Grey



Light Grey





WPC Ant Trail Texture Series

Next-Generation Wear-Resistant Texture

The Ant Trail Texture Hollow Outdoor decking is a hollow composite board designed specifically for outdoor use. Its unique “Ant Trail” textured surface not only provides a natural and attractive look but also enhances slip resistance.

Highly wear-resistant, it maintains its durability and appearance even in high-traffic or heavily used areas, making it an ideal choice for long-lasting and stylish outdoor flooring.



Resistant to mould and fading



Waterproof and weather resistant




Low maintenance, easy care

Decking Installation System

Stainless Steel Start Clip



Stainless Steel Middle Clip

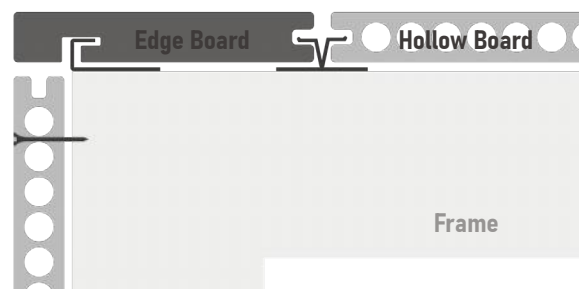



Surlyn Double-Sided Board

Size: 140*23*5400mm Hollow Panel 


140*23*5400mm Edge Panel 




Walnut / IPE



Antique / Teak

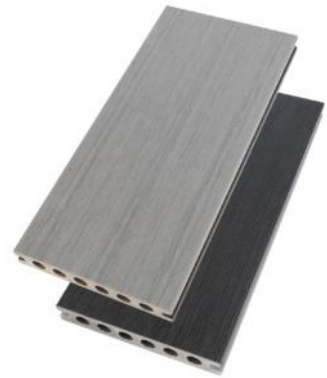

Ashwood / Dark Grey

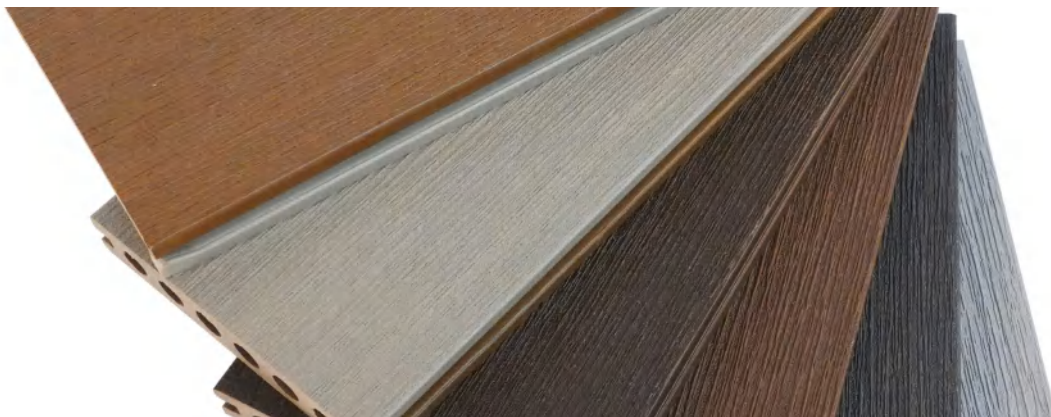



PREMIUM
UPGRADE

WPC Surlyn Series

Innovative Surlyn Coating Co-Extrusion Decking

The WPC Surlyn Series of New Tech 2nd Generation Co-Extrusion decking is designed with an advanced Surlyn coating layer, creating a powerful armor around the composite core.

This innovative protection effectively resists UV rays, water penetration, and harsh weather conditions, ensuring the boards remain vibrant and fade-resistant for years to come. With its extremely low water absorption, the Surlyn Series delivers long-lasting durability against sun, rain, and cold.

Combining strength with elegance, the WPC Surlyn Series retains the natural beauty of timber while offering superior performance and minimal maintenance.



Surlyn Armor Coating





Long-Lasting Colour & Durability

Decking Installation System

Stainless Steel Start Clip



Stainless Steel Middle Clip

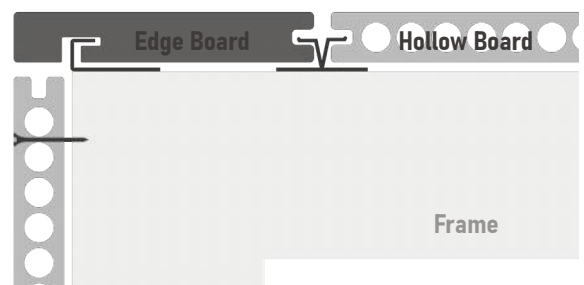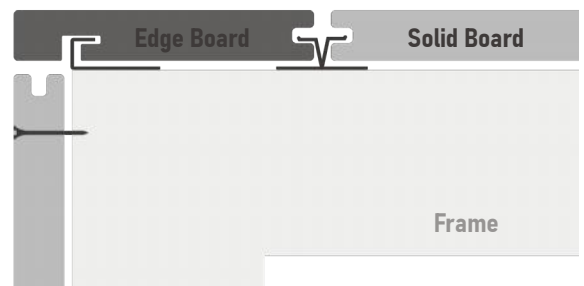



Surlyn Double-Sided Board

Size: 137*23*5400mm Hollow Panel



140*23*5400mm Edge Panel



IPE/Walnut



Teak/Antique



Ashwood/Dark Grey

Surlyn Double-Sided Board

Size: 137*23*5400mm Solid Panel



140*23*5400mm Edge Panel



IPE/Walnut



Teak/Antique



Ashwood/Dark Grey



WPC Surlyn (No Gap) Series

Quick drainage · Easy cleaning · Refined look

Discover the SURLYN COATING (NO GAP) Series, crafted for courtyards and landscaped gardens that value both beauty and durability. Each board is protected with a Surlyn layer, resisting UV rays, moisture, and harsh weather while keeping colours bright for years.

The no-gap profile keeps leaves and debris on the surface for easy cleaning, while precision-cut angled joints drain water quickly without puddles.

With fade resistance and a refined finish, this series offers long-lasting elegance with minimal upkeep. SURLYN COATING (NO GAP) decking turns outdoor spaces into stylish, practical retreats for relaxation or gatherings.



Surlyn Coating Protection




No Gap Design

Decking Installation System

Stainless Steel Start Clip

Plastic Middle Clip

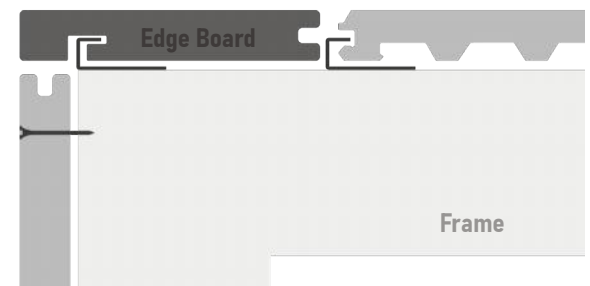



PE Double-Sided Board

Size: 145*23*5400mm Solid Panel


140*23*5400mm Edge Panel



IPE




Teak

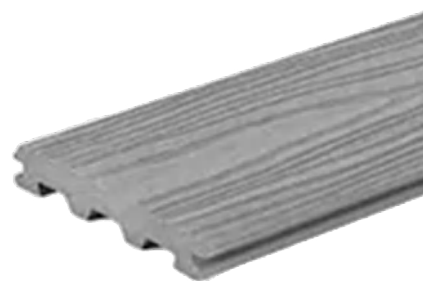

Ashwood



Walnut

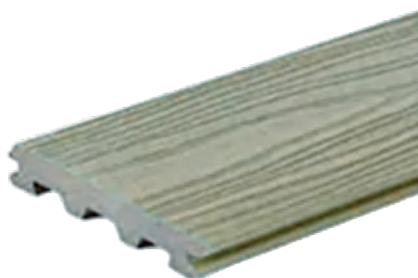

Antique



Dark Grey

Aluminum Decking Edge L-Skirting

Size: 48*26*2000mm

Teak / Dark Grey / IPE / Antique



Surlyn Coating Deck Edge Flat Skirting

Size: 140*11*5400mm

Teak / Dark Grey / Walnut / IPE / Antique / Ashwood



PVC ASA Series

Quick drainage · Easy cleaning · Refined look

Introducing the PVC ASA Decking Series — a premium upgrade from traditional WPC boards. Made from 100% virgin PVC and capped with an advanced ASA surface layer, this series avoids the swelling, rotting, and mould growth often found in WPC, even under wet or coastal conditions.


Compared with WPC, PVC+ASA decking is **lighter, stronger, and more dimensionally stable**, resisting warping and expansion in extreme weather. Its non-porous ASA surface ensures superior UV resistance, fade protection, and stain resistance, keeping colours rich and vibrant for years.


Designed for low maintenance, PVC ASA decking requires little more than an occasional rinse to stay clean, combining the refined look of luxury timber with outstanding durability. It is the smart alternative for those seeking long-lasting beauty and performance beyond WPC.

Decking Installation System

Stainless Steel Start Clip


Plastic T-Clip

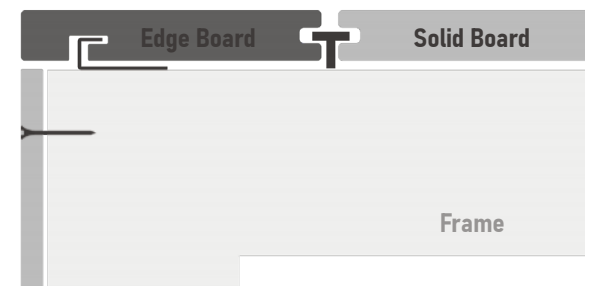

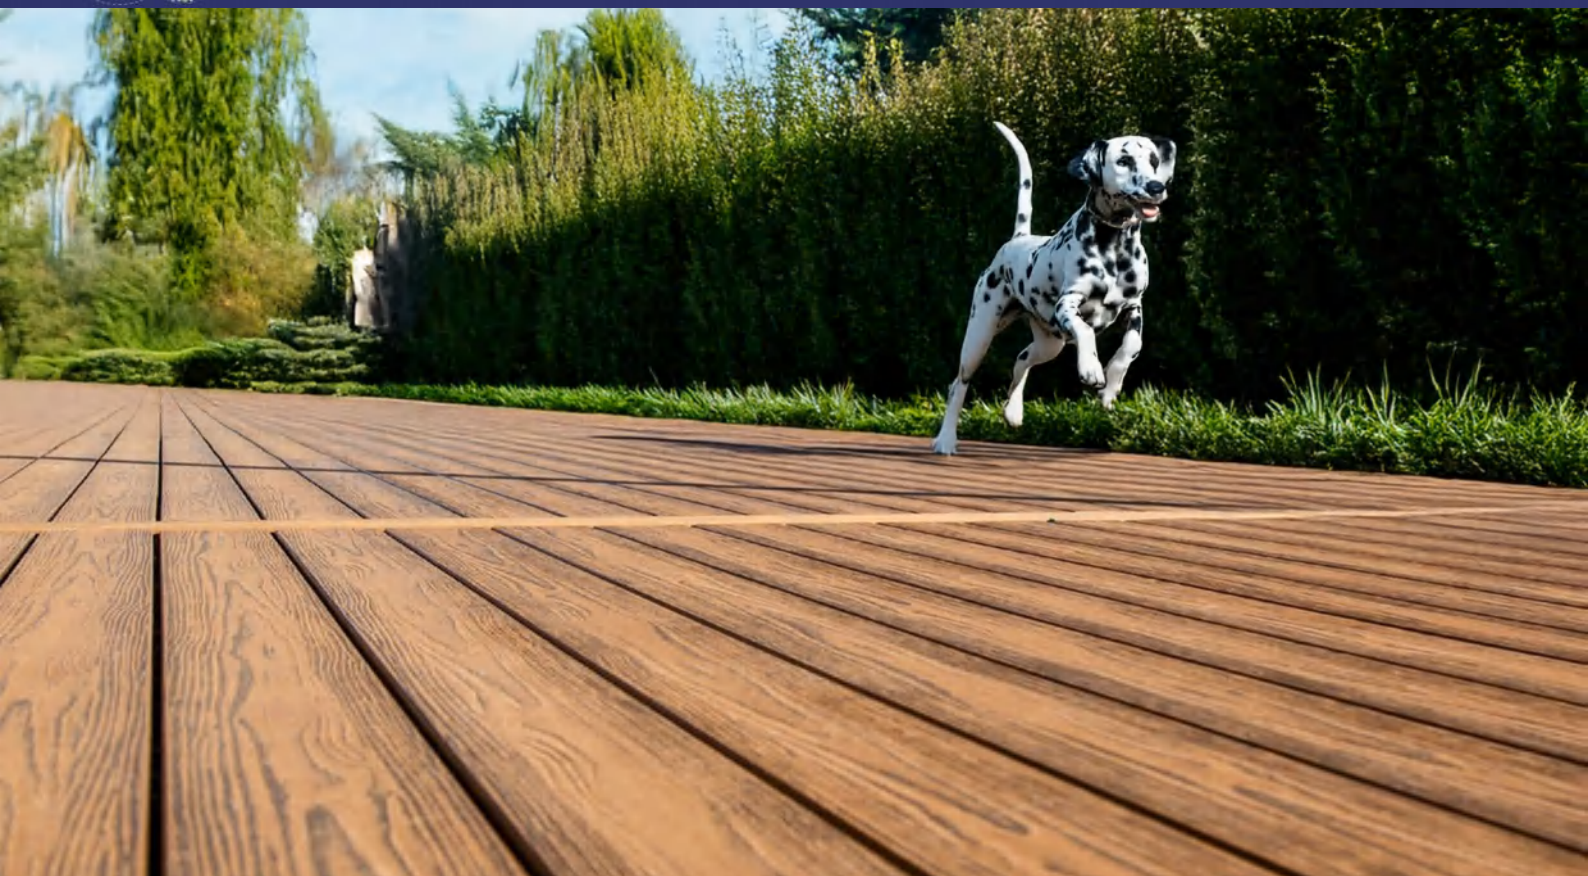

PVC ASA Board

Size: 140*24*5400mm Solid Panel



Fossil



Tawny



Pecan



Graphite



Arabica



Silvergrey



Pacific Merbau



Willow Oak

PVC ASA Edge Board

Size: 140*24*5400mm



All colours are available with matching edge boards.

PVC ASA Fascia Board

Size: 150*12*5400mm



All colours are available with matching edge boards.



PVC Estate Series

Quick drainage · Easy cleaning · Refined look

Estate PVC Series reimagines outdoor decking with its **lightweight composition and excellent dimensional stability**. Thanks to PVC's low expansion rate, the boards remain consistent in shape and size even under changing temperatures, ensuring long-lasting performance in demanding outdoor settings.


What sets this series apart is its **heat-bendable feature**, allowing the boards to be carefully shaped into curves. This opens up creative possibilities in garden and landscape projects, adding flowing lines and playful design elements that traditional straight decking cannot achieve.

Durable, versatile, and low-maintenance, the Estate PVC Series is the perfect choice for homeowners and designers seeking both practicality and creative freedom.

Decking Installation System

Stainless Steel Star Drive Screw

Decking Material Plug

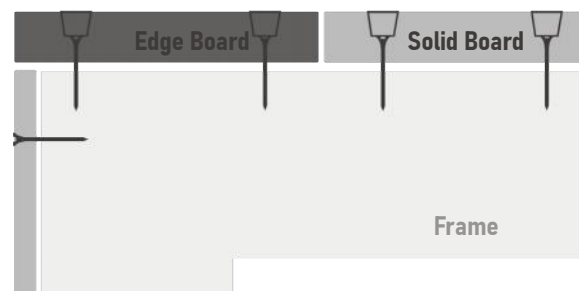



PVC Estate Board

Size: 185*30*3600mm Solid Panel




Chestnut



Cedar



Golden Teak

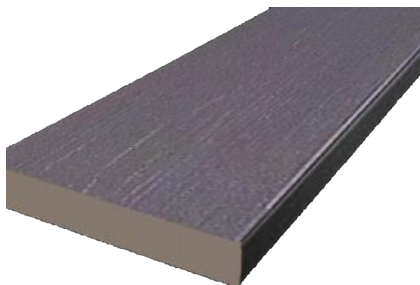

Vintage Slate



Grey



Moor Mist

PVC Estate Edge Board

Size: 185*30*3600mm



All colours are available with matching edge boards.

PVC Estate Fascia Board

Size: 140*10*3600mm



All colours are available with matching edge boards.



HardBark® TerraStone

Resin Bound Stone Surfacing

Resin-formulated natural-colored stones are the main material, suitable for both wall and floor decoration. They require a simple and convenient wall substrate for easy installation. These new materials can be used for indoor and outdoor construction, including floors, walls, swimming pools, stairs, iron plates, and wooden boards.



FINE SAND

1-2 mm


Fine sand is ideal for walls, offering strong adhesion that prevents sand detachment.



MEDIUM SAND

2-4 mm

Medium sand suits walls or light-traffic floors, with visible particles and strong decorative texture.

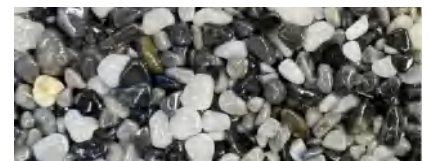

COARSE SAND

4-6 mm

Coarse sand is perfect for large ground areas like driveways, supporting light vehicle loads.



Non-toxic & Eco-friendly



Natural Stone Appearance



Slip-Resistant Surface




Seamless Finish



Low Maintenance & Easy to Clean




Easy Installation



226




227



228




234



236


COARSE SAND
4-6 mm



210



231



235

MEDIUM SAND
2-4 mm



207



208



217



224

FINE SAND
1-2 mm

Product Information

Packaging Specification: 25 kg / bucket

Application Surfaces: Cement Floors Ceramic Tiles Stone Slabs Glass
Plywood Gypsum Board Wall Surfaces etc.

Application Scenario:



Garden



Driveway



Garage



Renovation




Interior / Bathroom



Swimming Pool

Application Area / Surface	Recommended Thickness	Coverage per Bucket	Suggested Supporting Products
Wall / Vertical Surface Decoration	2-3 mm	Approx. 3-4 m ²	Primer + Matte Sand Sealing Penetrating Clear Primer (Required)
Indoor Floors / Balconies	4-6 mm	Approx. 2 m ²	Primer (Required)
Load-Bearing Areas (e.g., Driveways)	10-15 mm	Approx. 1 m ²	Primer, multi-layer application suggested
Pool Interior / Exterior	5-10 mm	Approx. 1.5-2.5 m ²	Primer + Waterproof Strengthening Agent (Required)
Tile Surface Renovation	4-6 mm	Approx. 2 m ²	Primer (Required)
Old Stone / Brick Surface Renovation	4-6 mm	Approx. 2 m ²	Primer (Required)

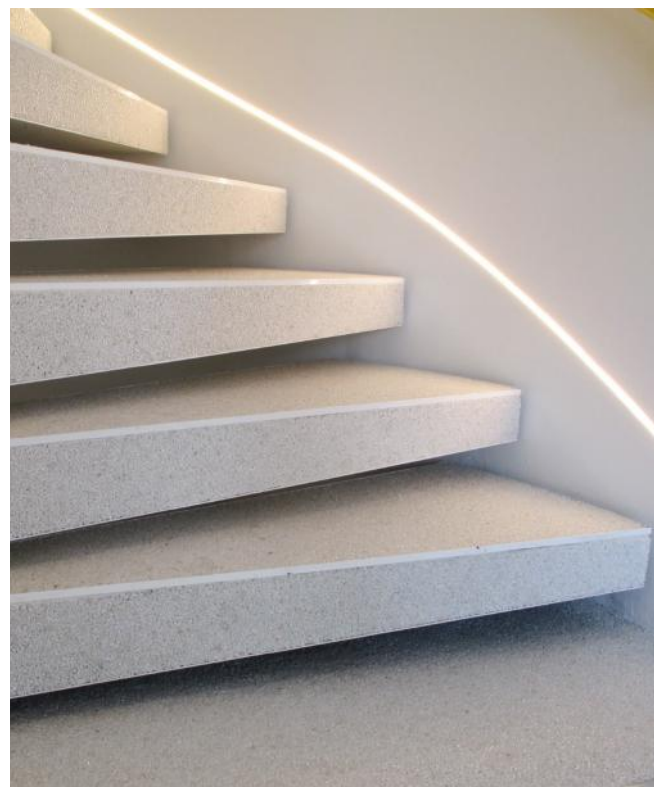

TerraStone Application Process & Precautions



1. Pre-Construction Preparation

1. Ensure no rainfall three days before and after construction. Ambient temperature should be $\geq 5^{\circ}\text{C}$ with humidity below 80%.
2. The substrate must be level, solid, free of hollow spots and cracks. Remove all dust, grease, and loose material from the surface.
3. For smooth surfaces such as old concrete, bricks, tiles, or stone slabs, thoroughly clean and dry to ensure moisture content $\leq 9\%$ and pH below 10.

2. Primer Application

1. Choose a primer suitable for the substrate type and apply evenly using a roller.
2. Each 5KG bucket of primer covers approximately 20–25m². Apply uniformly without missing spots or over-application.
3. Allow the primer to dry completely for 1–2 hours before proceeding with the main Terrace Stone application.



3. TerraStone Application



1. The product is ready to use out of the bucket; no water dilution needed. First, mix the A and B components thoroughly, then pour into the coloured aggregate bucket or mixing drum, ensuring every grain is coated with the binder.
2. Recommended single pass thickness is 10–15mm. Typical thicknesses: indoor floors and non-traffic outdoor areas 4–6mm; driveways and load-bearing areas 10–15mm; walls 2–4mm.
3. Products come in single or two-component systems:
 - Two-component products require mixing the A and B parts before adding aggregates;
 - Single-component products can be mixed directly with aggregates, with optional small amounts of water or additives as needed.
4. Use two trowels during application: one for spreading and one for finishing. **Apply firm, repeated pressure when trowelling to ensure a dense structure and avoid future sand shedding.** Lightly dampen trowels with soapy water to prevent sticking. **Compaction and smoothing are key to quality.**

4. Topcoat Application (Optional)

1. To enhance stain resistance, waterproofing and gloss, apply a specialised topcoat for indoor, wall, or high-demand areas.
2. One 5KG bucket covers about 15–20m² and should be applied only after the main layer is fully dry.
3. Allow 3–5 days for curing, with full drying taking at least 7 days.





5. Edge Trimming and Zoning (Optional)

1. Aluminium L-profiles (3mm, 5mm, 10mm, 14mm) can be used to create clean edges, design breaks, or stair details for a refined finish.
2. Fix L-profiles to the substrate with cement-based adhesive before applying Terrace Stone over them.



6. Post-Construction Curing

1. Choose a primer suitable for the substrate type and apply evenly using a roller.
2. Each 5KG bucket of primer covers approximately 20–25m². Apply uniformly without missing spots or over-application.
3. Allow the primer to dry completely for 1–2 hours before proceeding with the main Terrace Stone application.









ARTIFICIAL GRASS

UV-stabilized · Maintenance-free · Realistic look




45mm High Artificial Grass

45(H)mm

2x15m / 4x15m

2x25m / 4x25m / 3.65x25m

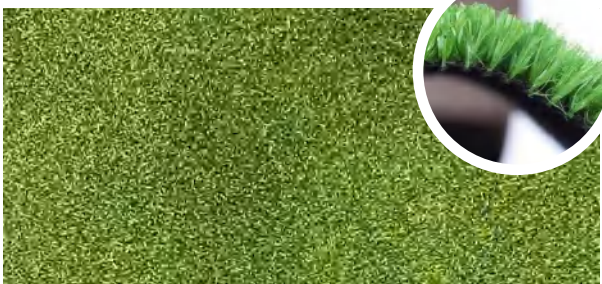

15mm High Artificial Golf Grass

15(H)mm

2x25m/ 4x25m





3D Synthetic Grass

Durable · Evergreen · Lush appearance



3D Synthetic Grass-Coin

F001

2x25m / 4x20m / 4x25m



3D Synthetic Grass-Versailles

F002

2x25m / 4x20m / 4x25m



3D Synthetic Grass-Rock

F003

2x25m / 4x20m / 4x25m



3D Synthetic Grass-Chess

F004

2x25m / 4x20m / 4x25m



DECORATIVE PEBBLES

Natural · High Quality · Elegant Design



HIGH POLISHED WHITE

20-30mm | 25kg/Bag



HIGH POLISHED MIXED

20-30mm | 25kg/Bag



POLISHED BLACK

20-30mm | 25kg/Bag



WHITE

20-30mm | 25kg/Bag



Aluminium Garden Edging

Durable · Evergreen · Lush Appearance



Heights: 50mm / 75mm / 100mm / 150mm



Matt Black



Weathered Steel



Matt White



Spike Guide




Spikes 150mm / 300mm



T Shape Connector



L Shape Connector

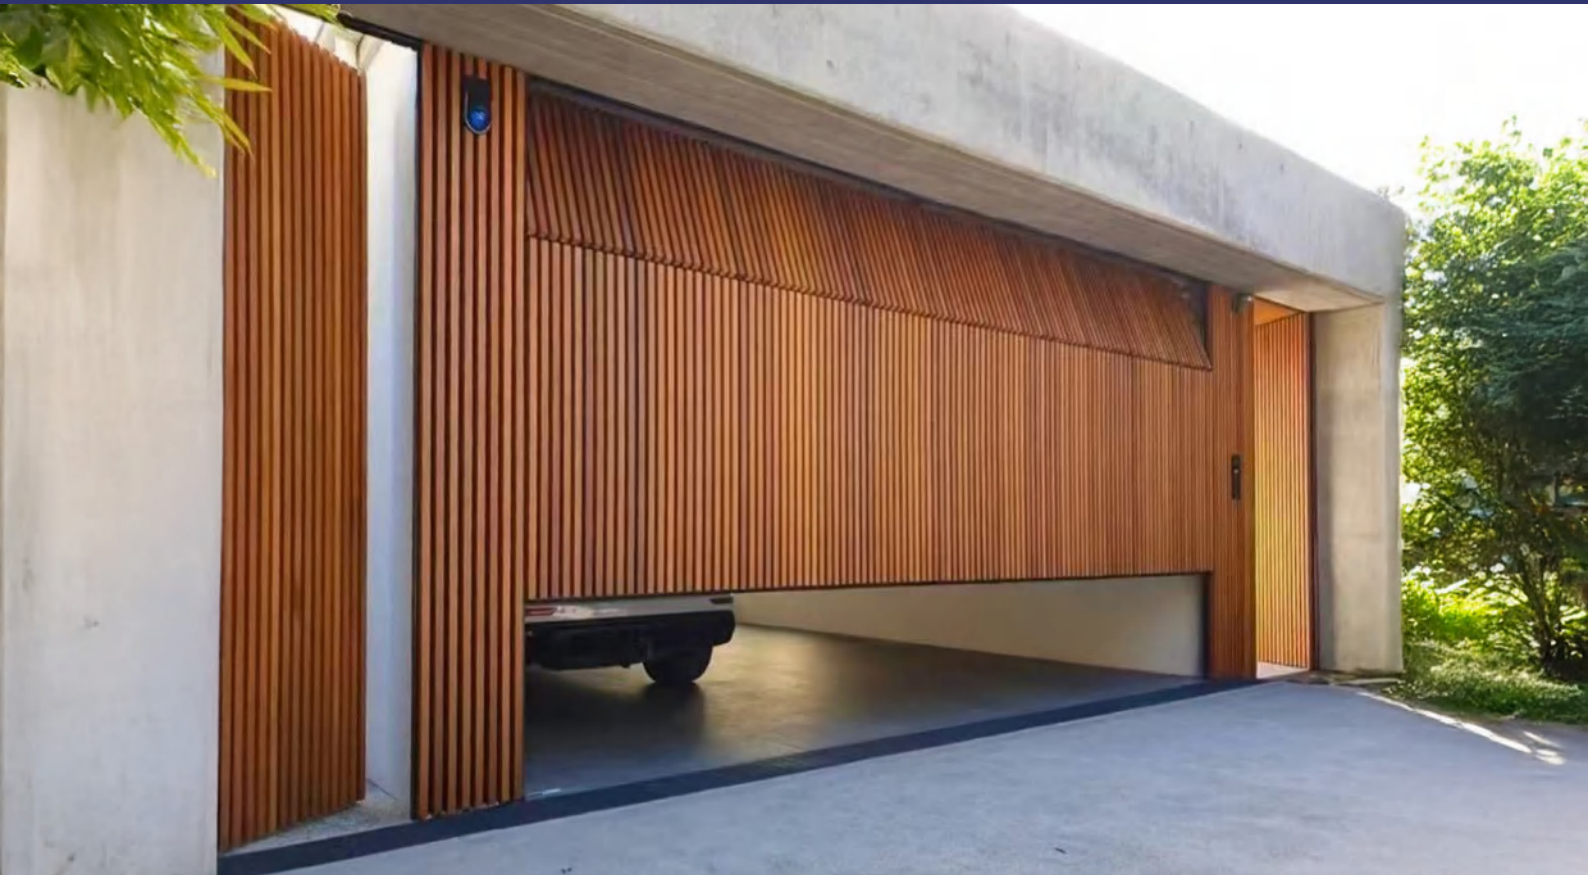


ALUMINIUM CLADDING

Lightweight · Weather-Resistant · Modern

Our aluminium cladding systems are ideal for both wall and ceiling applications. They offer a sleek architectural finish and excellent weather resistance, perfect for modern design projects.



#3571



#3611




#3572



#3573



#3571



#3611




#3572



#3573

Wall Cladding Accessories

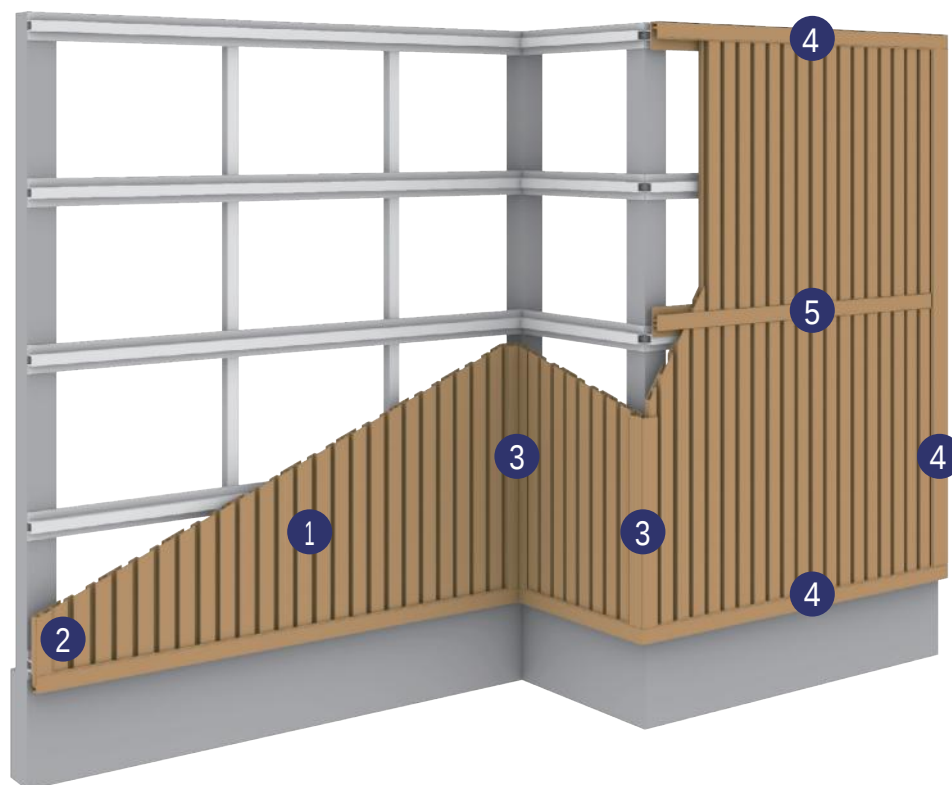

1. Interlocking Cladding



CLAD 198.8

Profiles: 198.8x16.5mm
Length: 6500mm



CLAD CASTEELATED 198.8

Profiles: 198.8x16.5mm
Length: 6500mm

2. Starter Profile

The starter piece serves as the initial support for the first row of cladding, ensuring alignment, stability, and moisture protection.

CLAD STARTER

Profiles: 56x16.3mm
Length: 6500mm



3. Corner Profile - 2 Piece

Reversible two-piece corner profile designed to conceal both internal and external corner details.



CORNER M

Profiles: 38x38mm
Length: 6500mm



CORNER F

Profiles: 50x50mm
Length: 6500mm



4. Finisher Profile - 2 Piece

The two-piece finisher profile secures the final row and edges, ensuring moisture resistance and a clean, finished look.




TRIM F

Profiles: 70.5x18.5mm
Length: 6500mm



TRIM M70 / M40

Profiles: 70.5x6.2mm
43.2x17.3mm
Length: 6500mm




5. Joiner Profile - 2 Piece

The two-piece joiner profile connects cladding boards with a tight seal, offering moisture protection and a clean finish.



CLAD T JOINER F

Profiles: 75x17mm
Length: 6500mm



CLAD T JOINER M

Profiles: 40x18mm
Length: 6500mm





Aluminium Garage Cladding

Aluminium Garage Cladding

Panel Profiles: 178.8x31.8mm


Length: 6500mm




End



Base

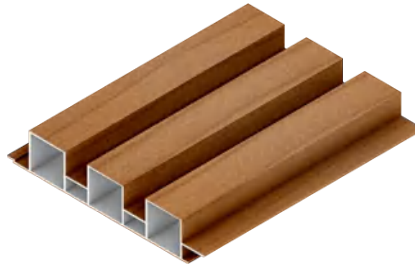

#3571

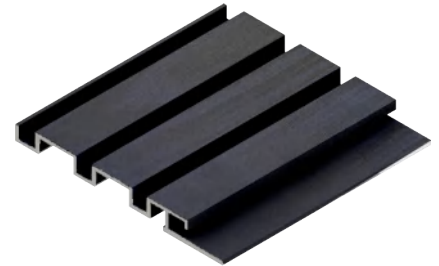


#3611




#3573



#3668

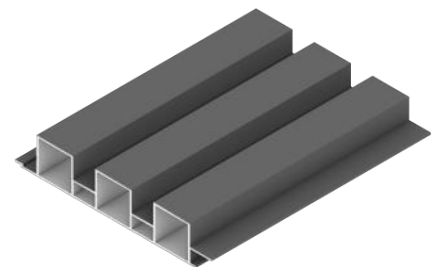

MONUMENT

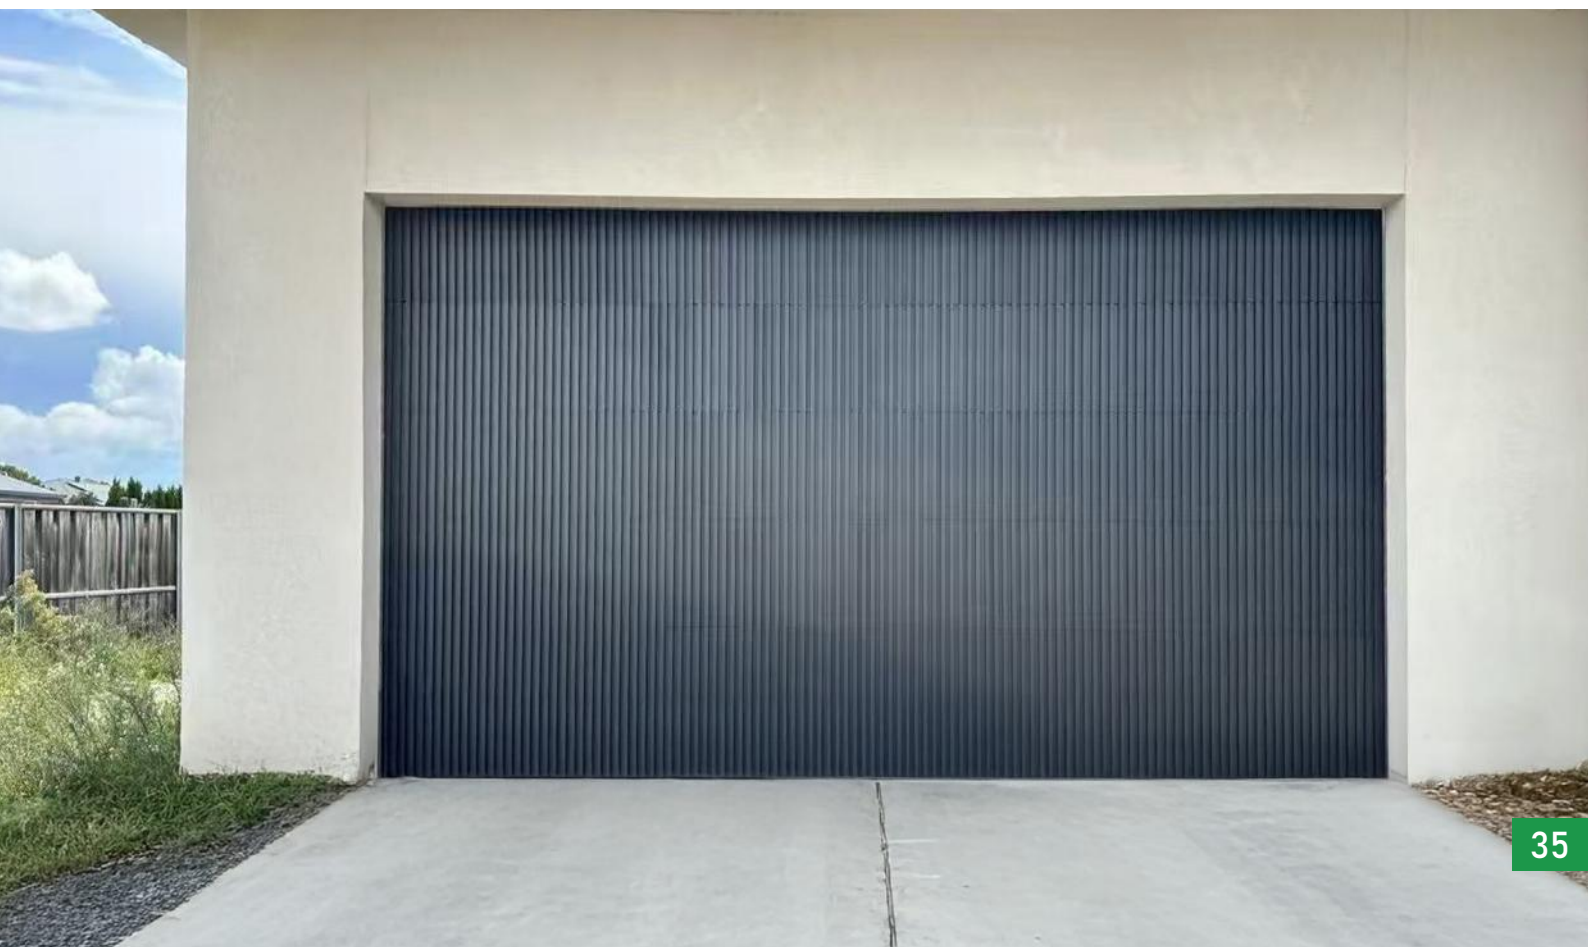



WPC CLADDING


UV-Resistant · Waterproof · High Durability

Our WPC cladding systems are perfect for both wall and ceiling applications, providing a natural wood-look finish with excellent durability and weather resistance. Designed for modern interiors and exteriors, they combine style and low maintenance for long-lasting performance.



1. WPC Cladding


Profiles: 222x25mm

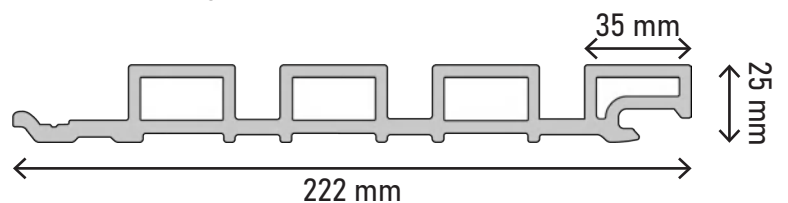

Length: 2900mm


4000mm

5400mm

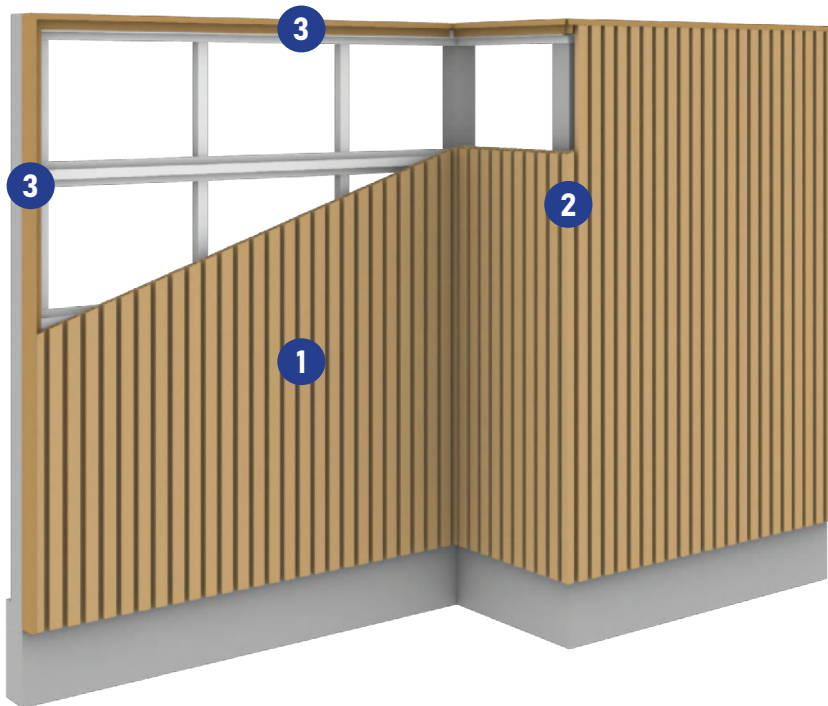

2. WPC Corner Edge Cover

Profiles: 63x63mm




Length: 2900mm

4000mm

(Accessories match the cladding color)

3. Aluminium F-Skirting

Profiles: 40x54mm






Length: 2900mm

4000mm

(Accessories match the cladding color)



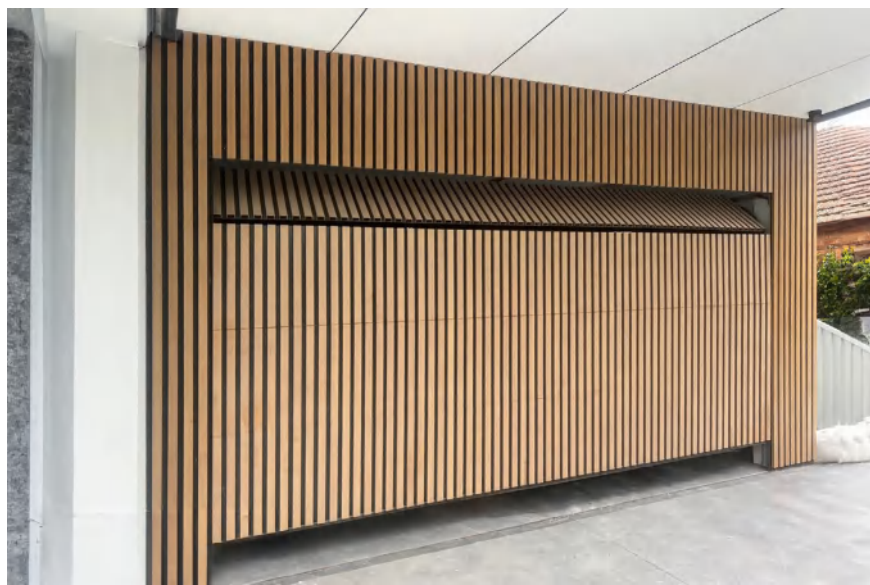


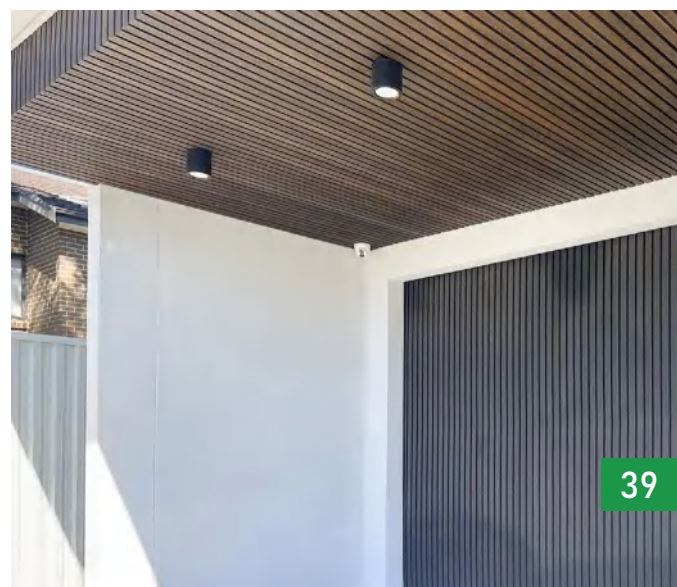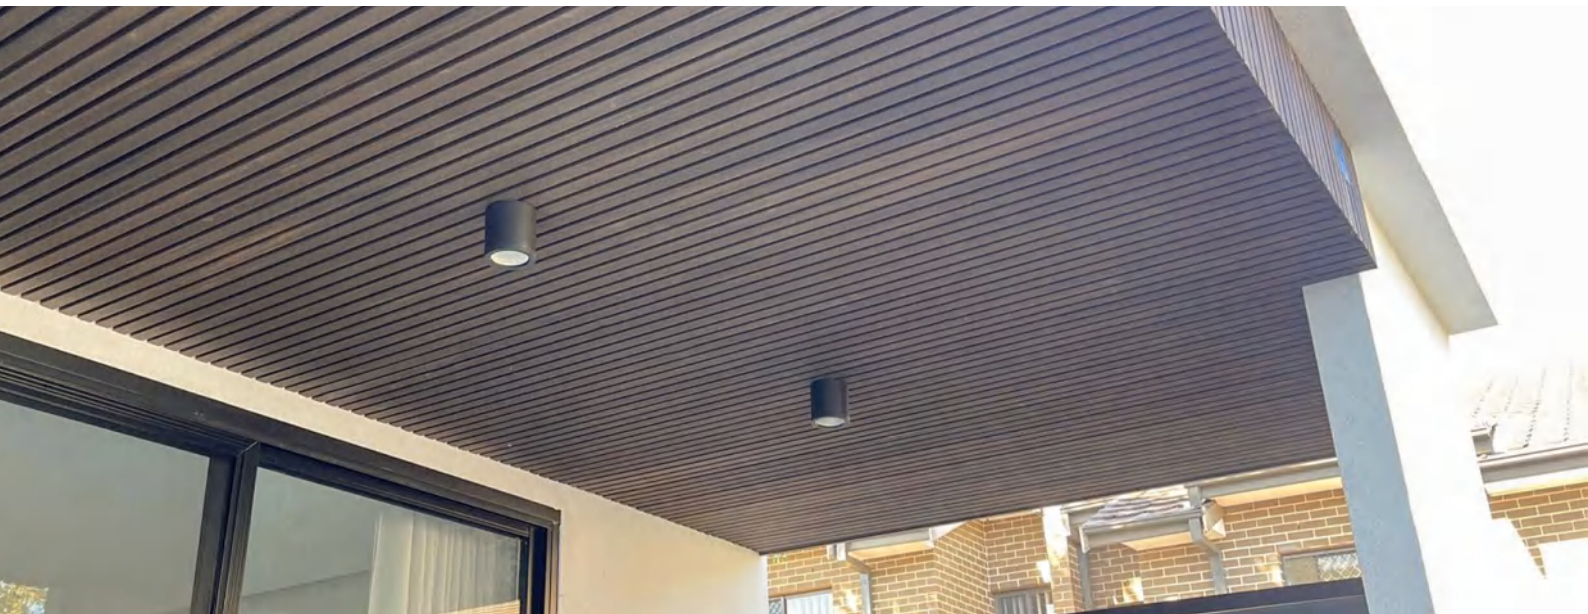



ACOUSTIC PANEL

Elegant Design · Easy Installation · Luxury Quality

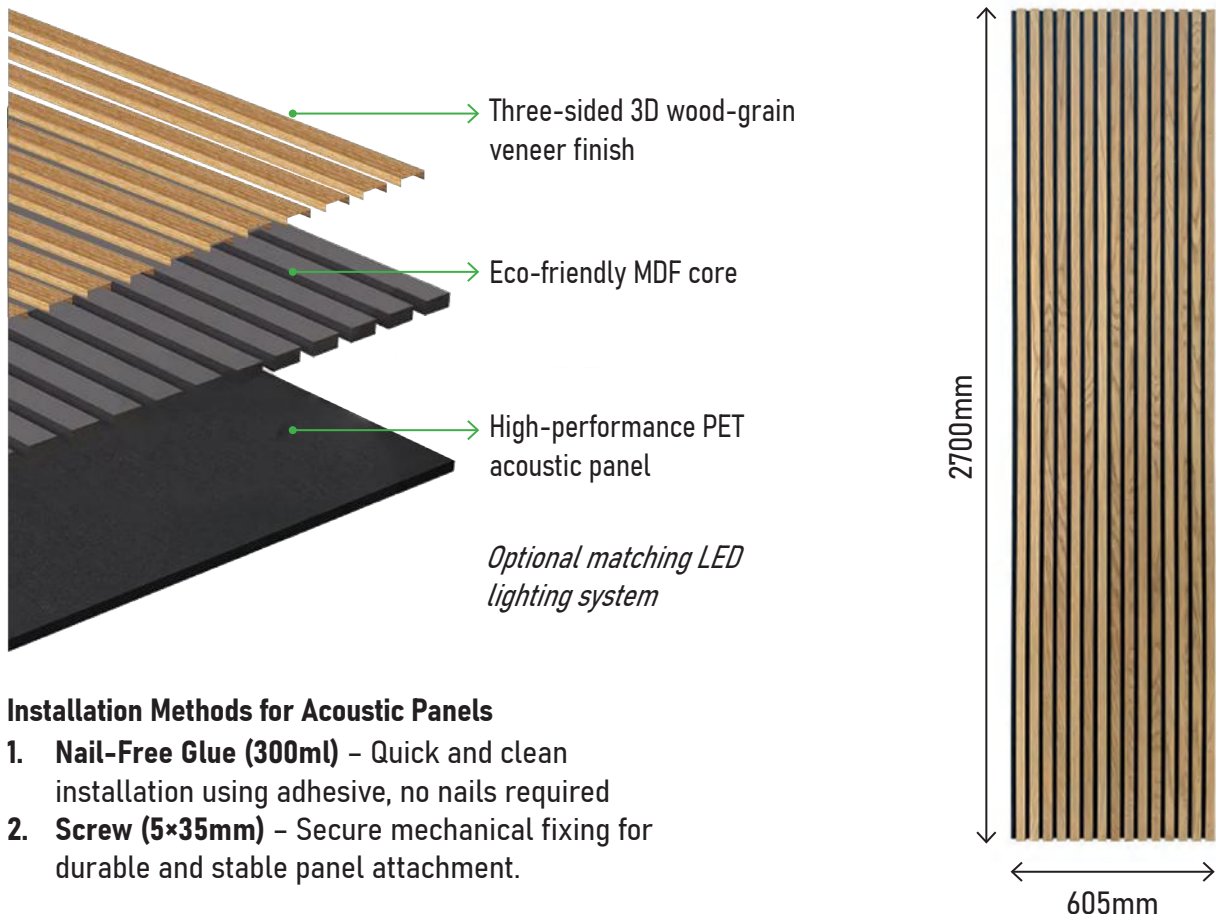


Installation Methods for Acoustic Panels

1. **Nail-Free Glue (300ml)** – Quick and clean installation using adhesive, no nails required
2. **Screw (5×35mm)** – Secure mechanical fixing for durable and stable panel attachment.




JM1114-MBW-DT31

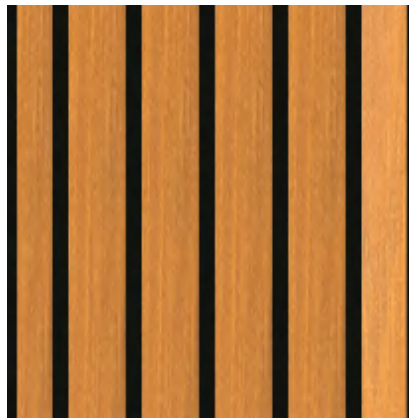


JM1114-MBW-H363



JM1114-MBW-H501

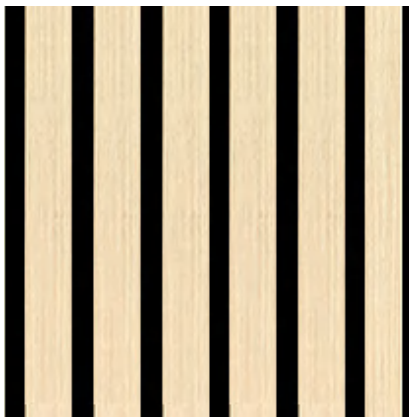

JM1114-MBW-H548

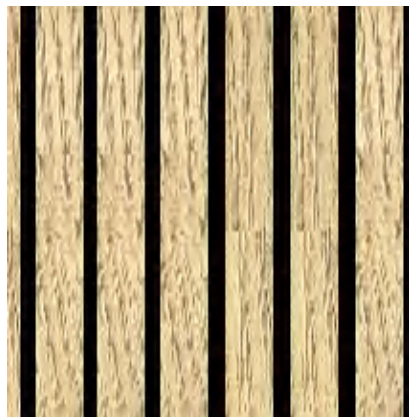

JM1114-MBW-H569



JMW4-MBW-DT104



Sydney WAREHOUSE - 5188m²

Unit B/290 Parramatta Road,
Auburn NSW 2144

- ☎ (02) 5657 8989
- ☎ 0455 398 888 Lyn
- ☎ 0416 355 290 Kelly
- ☎ 0426 518 290 Echo
- ☎ 0455 666 999 Bill (mandarin)
- ✉ info@heritonfencing.com.au
- 📞 halibaba777

Melbourne WAREHOUSE - 1377m²

18 Commercial Dr, Dandenong
South VIC 3175

- ☎ (03) 9768 2895
- ☎ 0456 629 999
- ✉ yolanda@heritonfencing.com.au
- 📞 heritonfencing

Brisbane WAREHOUSE - 2078m²

62 Achievement Cres, Acacia
Ridge QLD 4110

- ☎ (07) 3736 0904
- ☎ 0423 888 789
- ☎ 0411 789 666
- ☎ 0452 213 568 John (mandarin)
- ✉ info@heriton.net
- 📞 Fence9999

Sydney (Trade Only) WAREHOUSE - 1898m²

Aluminium Warehouse

116 Christina Rd, Villawood NSW 2163

- ☎ 0296 441 242
- ☎ 0452 077 111
- ☎ 0425 009 190 Tim
- ☎ 0475 767 777 Kevin (mandarin)
- ✉ Tim@heriton-aluminium.com.au
- ✉ Kevin@heriton-aluminium.com.au
- ✉ Chloeguo@heriton-aluminium.com.au

Canberra WAREHOUSE - 1299m²

136 Gilmore Rd, Queanbeyan West NSW 2620

- ☎ 0413 599 977
- ☎ (02) 6643 0509
- ✉ info@heritoncanberra.com.au
- 📞 HeritonCanberra

Newcastle SHOWROOM

61 Ian St, Eleebana NSW 2282

- ☎ 0416 678 887 Orson
- ✉ orson@heritonfencing.com.au

 **HERITON**